Morocana Square Back System



DOCUMENT SQUARE BACK BOOKLET OPERATING SYSTEM

OPERATORS MANUAL

Morgana Systems Limited United Kingdom

Telephone: (01908) 608888 Facsimile: (01908) 692399

Website: www.morgana.co.uk

ISSUE 1 November 2005

70-072

CONTENTS



Introduction
About your Automatic Square Back System 5 How the Square Back System Works Adjustments and Settings Stacker
Using your Automatic Square Back System 8 Online Operation Hand Feeding
Error Conditions
Maintenance
Specifications15
Declaration of Conformity
Index 18

CONVENTIONS	The following conventions are used in this manual:
Warning	Warning messages alert you to a specific procedure or practice which, if not followed correctly, could cause serious personal injury.
Caution	Caution messages alert you to a specific procedure or practice which, if not followed correctly, could result in damage to equipment.

INTRODUCTION



The Automatic Square Back System post-processes stitched or stapled booklets to give them the professional flat appearance of a perfect bound book, but with the security of a stitched spine. The resulting Square Back booklets are flat, making them easy to stack, handle and pack.

In these instructions the Automatic Square Back System is referred to as the SBS.

INSTALLATION

Your SBS should be located on a level floor.

If your SBS is used online with other equipment, installation requires specialist knowledge and should therefore only be Carried out by a Morgana approved engineer.

Caution

This machine must only be plugged into an electrical supply line of the correct voltage and with a proven earth. Any damage caused by failure to do so will not be covered by the guarantee. The required machine voltage is shown on the label on the rear of the unit.

SAFETY INFORMATION

Your SBS has been designed with safety as a key feature. However, to ensure it is used safely please observe the following cautions and warnings:

Warnings

- As with all electrical equipment, disconnect the unit from the mains electricity supply when replacing fuses or when instructed to do so in this manual.
- The disconnect device is the appliance inlet.
- Do not attempt to put your hands or objects, other than booklets, inside the SBS during operation.
- Do not remove machine covers. Only competent and trained service engineers should service this equipment.

GETTING HELP


We are confident that your SBS will give many years of trouble-free production. If you have any queries or problems, in the first instance please refer to the problem solving section in this book. Should you require further assistance, the Morgana Service Department will be happy to help.

2 About your Automatic Square Back System

HOW THE SQUARE BACK SYSTEM WORKS

- Outfeed
- 2 SquareBack Booklets
- **3** Stacker Support
- 4 Stacker Release Lever
- Sook Thickness Adjustment
- 6 Stacker Full Sensor
- Operating Mode Adjustment
- 8 Sidelay
- Infeed (Hand Feed)

ADJUSTMENTS AND SETTINGS



The booklet is transported, spine first, into the SBS. The SquareBack spine is formed and the booklet is then delivered to the stacker on the top of the SBS.

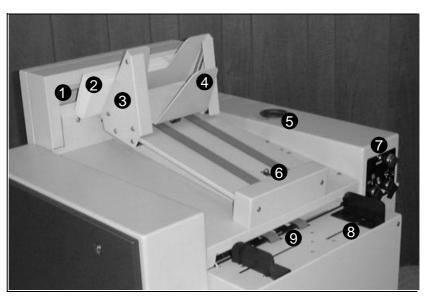


Fig 1. The Automatic Square Back System

Mains ON/OFF

The Mains ON/OFF switch is on the front of the machine. 1 = ON, 0 = OFF.

Mains Input

The Mains Input is on the back of the machine. Alongside the Mains Input is a label indicating the machine voltage requirements.

Book Thickness Adjustment

The Book Thickness Adjustment (see Fig 2.) can be used to obtain optimum results with different booklet thicknesses. Turn the knob clockwise to increase the effect, and anti-clockwise to decrease the effect. The type of material will also influence the required setting.



Operating Mode Selection (see Fig 3.)

Single Pass: The SBS will process the booklet a single time. This is the default setting, and is suitable for the vast majority of booklets.

Double Pass: The SBS will process the booklet twice. This can be useful for thick, inflexible covers which are more resistant to re-forming.

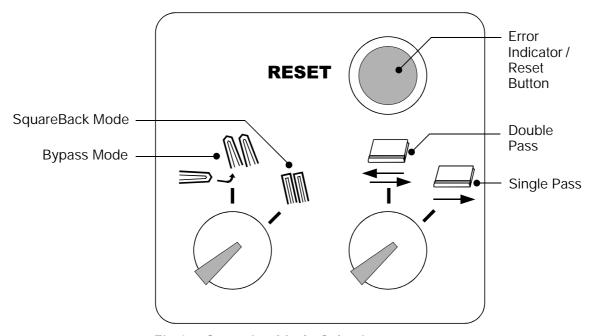


Fig 3. Operating Mode Selection

SquareBack Mode: The booklets will be processed and receive a squared spine (SquareBack).

Bypass Mode: The booklets will bypass the Square-backing process and will be delivered straight to the stacker. In Bypass Mode, the stacker may require adjustment (See "Stacker" on page 7.).

Error Indicator / Reset Button

This indicator/button performs several functions -

- A green light indicates an error. Correct the error and then press the button to reset the SBS.
- The button can be used to start the machine if it is not automatically started by hand-feeding or by connected equipment.
- When hand-feeding, the green light flashes as each book is processed. Another booklet can be inserted when the light goes out.

STACKER

Booklets are stacked, spine uppermost, in the stacker. The stacker support automatically recedes to accommodate the increasing stack. When the stacker is full, a sensor will automatically stop the SBS and the green Error/Reset light illuminates.

Unload the booklets, slide the stacker support back up towards the outfeed and then restart the connected equipment.

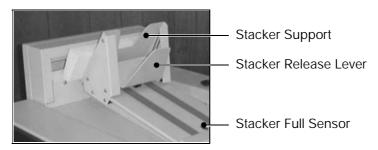


Fig 4. The SBS Stacker

Note:

- 1. To move the stacker support, squeeze the stacker release lever towards the stacker support.
- 2. If booklets are not processed (ie. in Bypass Mode), they may stack better lying flat. Slide the stacker support away from the outfeed, taking care not to trigger the stacker full sensor.
- 3. If small booklets do not stack well, adjustment may be required, see "Small booklets do not stack well" on page 11.

3 Using your Automatic Square Back System

ONLINE OPERATION

The SBS can be used online to a variety of bookletmaking machines. It will automatically start and stop as required, controlled by the connected equipment.

- 1. First select the required Operating Mode and Book Thickness Adjustment (see Chapter 2, 'About your Automatic Square Back System').
- 2. Start the connected equipment and run a single booklet through the SBS.
- Inspect the formed booklet, and adjust the Book Thickness Adjustment or the Operating Mode as required.

Spine Formations

	Correct: This is how a well formed spine should look.
×	Incorrect: The spine has not been formed sufficiently. Increase the Book Thickness Adjustment and/or use Double Pass Mode
x	Incorrect: The spine has been over-formed resulting in damage or creasing on the cover. Decrease the Book Thickness Adjustment and/or use Single Pass Mode.

- Adjust the operating speed of the connected equipment to approximately 1,000 booklets per hour.
 (Note: some connected equipment will automatically adjust to an appropriate speed for the SBS.)
- 5. Gradually increase the speed to about 1,400 booklets per hour (single pass mode). If the speed is set too high, some booklets will not be processed. They will be clearly identifiable in the stacker.

HAND FEEDING

Booklets can be hand-fed into the SBS either when the unit is stand-alone, or when it is connected to a booklet maker. It is not necessary to disconnect it from other connected machinery.

- 1. Adjust the sidelays to suit the booklet size.
- 2. Insert a booklet, spine first, into the infeed.
- 3. The completed booklet is delivered into the stacker.

The green Error/Reset indicator flashes as each book is processed. Another booklet can be inserted when the light goes out.

If the booklets are inserted too quickly, some will not be processed. They will be clearly identifiable in the stacker.

Caution

- Do not exceed the specified book thickness.
 Minimum: 1mm (0.04")
 Maximum: 6.5mm (0.25") This is approximately 30 sheets of 80gsm (20# bond) folded into a 120 page booklet.
- Only process one booklet at a time, DO NOT try to process several booklets at once.

WET INK

Avoid using the SBS on booklets where the ink has not dried. This may result in ink transfer and will increase the amount of cleaning required (see Chapter 5, 'Maintenance').

4 Error Conditions

BOOKLET JAMMED INSIDE SBS

If a booklet jams in the SBS for any reason, switch the SBS off at the mains input and then switch it back on again. The machine will reset and the booklet should be ejected onto the stacker. If the booklet is not ejected, press the green Error / Reset button.

If the booklet still remains inside the SBS, it must be removed.

- Switch the SBS OFF and unplug the mains input lead.
- Push in the two securing latches and gently lower the front cover downwards.

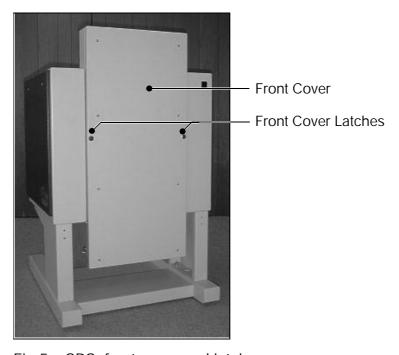


Fig 5. SBS, front cover and latches

Open the top lid by lifting it upwards.

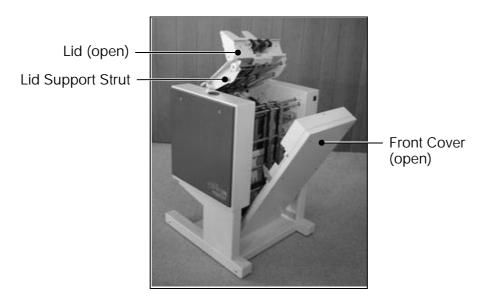


Fig 6. The SBS with front cover and lid opened

• Retrieve the booklet from inside the machine. Take care not to dislodge any of the conveyor belts.

Caution

If the booklet cannot be removed because it is jammed in the clamp mechanism, do not attempt to force the mechanism open. Contact your Morgana service Department.

- Close the SBS lid by lifting it slightly, push the support strut and then lower the lid.
- Lift up the front cover and push it closed, ensuring that the latches re-engage.

Warning

When releasing the SBS lid support strut, hold the lid securely and take care not to drop it on your hand.

SMALL BOOKLETS DO NOT STACK WELL

If small booklets do not stack tidily, the booklet control springs should be used.

Open the front cover of the SBS, as explained above, and release the two springs by pulling them out from

underneath the shaft. When the springs are not required, they should be tucked back under the shaft.

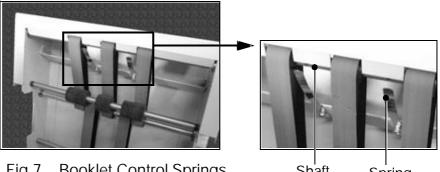


Fig 7. Booklet Control Springs

Shaft Spring

UNEVENLY FORMED SPINE

If the spine is well formed at only one end of the booklet, Double Pass Mode should be used. Some stocks may require Double Pass Mode to achieve an even result see "Spine Formations" on page 8).

REPLACING FUSES

Your SBS is fitted with two fuses at the mains input. If either of these fail, the SBS will not operate.

Warning

The SBS uses double-pole/neutral fusing (i.e., two fuses), so when changing fuses always first disconnect the machine from the mains electricity supply by switching OFF and unplugging the machine.

- Switch the SBS OFF and unplug the mains input lead. Open the flap on the fuse holder.
- Pull out each fuse casing in turn and check the fuse.
- Replace if necessary with a fuse of the correct specification, as detailed below.

Reference

230V machines:

730-016 Fuse, 1.25" (32mm) 5.0A HRC-Quick Acting F

115V machines:

730-020 Fuse, 1.25" (32mm) 10.0A HRC (Quick Acting, F)

SEEKING ASSISTANCE

If you require assistance with your SBS, please contact your local Morgana Service Department.

5 Maintenance

SERVICE INTERVAL

It is recommended that your SBS is serviced by an approved Morgana engineer at six to twelve month intervals (depending on usage). Please contact Morgana for further details.

OPERATOR MAINTENANCE

As with all machinery, your SBS will benefit from regular cleaning to prevent build up of dust and general dirt.

- Check that the air vents are not obstructed or blocked. Obstructed air vents will cause the motor to overheat.
- Once a week, or as required, clean the carriage roller as explained below.
- Do not use the SBS on booklets where the ink is still wet. This may result in ink transfer, and increase the need for cleaning.

Cleaning the Carriage Roller

- 1. Set the operating mode to Double Pass, and the Book Thickness Adjustment to maximum.
- 2. Take a maximum thickness (6.5mm) A4 size booklet, and wrap a sheet of paper around the outside. Alternatively, take about 30 sheets of A3 80gsm paper and fold into an A4 size booklet.
- 3. Apply a thin coating of a suitable cleaning product (see below) to the spine of the booklet.
- 4. Hand feed the booklet into the SBS in the normal way. Re-insert the booklet and reprocess about 5 times.
- 5. Remove the outer sheet, to give a fresh clean surface, and repeat step 4.

Suitable cleaning products include alcohol (isopropanol), offset litho blanket wash or RS Solvent Cleaner Aerosol. Always observe any health and safety information supplied with cleaning products.

Warning

Cleaning solvents are flammable. DO NOT spray them directly into the SBS.

Page 13

USA Users:

6.5mm is ¼"
For A4, use 8½ x 11"
For A3, use 11 x 17"
80gsm is 20# bond

SYSTEM



Caution Do not attempt to use a cloth to clean the carriage roller. This may leave loose fibres or debris inside the machine.

6 Specifications

Intended Use This product is intended for the re-forming of booklet

spines, to flatten the booklet and give a square appearance to the spine, within the specifications below.

Production up to 1400 per hour single pass

Booklet Size from 80 x 120mm to 250 x 350mm

(dependant on specification of connected equipment)

Booklet Thickness minimum of 1mm, 0.04"

maximum of 6.5mm, 0.25". This is approximately 30 sheets of 80gsm (20# bond) folded into a 120 page

booklet.

Dimensions

Width 707mm, 28" Depth 745mm, 29.5" Height 1242mm, 49" Weight 132kg, 291lb

Electrical 230V, 50Hz, 3A or 115V, 60Hz, 5A

Single Phase, Earthed supply required

Noise 72 dB(A)

Operating Conditions 10-35°C at 35-85% relative humidity

Production and specifications are subject to operating conditions. The specified paper thickness figures are given for guidance only. The actual performance of the machine will depend on the nature of the paper and covers used. In line with a policy of continual improvement, the manufacturer reserves the right to alter the materials or specifications of this product at any time

without notice.

Radio Frequency Emissions

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful



interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

7 Declaration of Conformity

Manufacturer's Name: Morgana Systems Limited

Manufacturer's Address: Davy Avenue

Knowlhill, Milton Keynes, Bucks.

Mk5 8HJ

United Kingdom

Declares that the product

Product Name: Morgana Square Back Syst em

Product Number: WA/ASM/0010 onwards

Conforms to the following Product Specifica-

tions:

Safety: 73/23/EEC & 98/37/EC Council Directive 'on the approx-

imation of laws of Member States relating to machinery'.

BS EN 60950: 1992

EMC: 89/336/EEC Council Directive 'on the approximation of

laws of Member States relating to electromagnetic com-

patibility'.

EN55022:1998 Class A

EN55024:1998 EN61000-3-2:2000

EN61000-3-3:1995 + A1:2001



A about your automatic Square Back System 5 adjustments 5 book thickness 5 operating mode 6 assistance 12	O on/off switch 5 online operation 8 operating mode 6 bypass mode 6 double pass 6 single pass 6
B book thickness 5 book thickness adjustment 5 booklet control springs 12 booklet jam 10	squareback mode 4 operating mode adjustment 5 operator maintenance 13 outfeed 5
bookletmaker, connection to 8 bypass mode 6	P power, mains input 5 problem solving 10
C cleaning 13 conformity 17	R reset button 6
D declaration of conformity 17 double pass 6	S safety 4 service interval 13 sidelay 5
E error conditions 10 error indicator 6	single pass 6 small booklets 11 specifications 15
F front cover 11 fuses 12	spine 8, 12 correct 8 incorrect 8 springs, booklet control 12 squareback mode 6
H hand feeding 9 help 4, 12	stacker 7 stacker full sensor 5 stacker release lever 5 stacker support 5
I infeed (hand feed) 5 ink, wet 9 installation 4 introduction 4	U using your automatic Square- Back System 8
J jam, booklet 10	W wet ink 9
L lid 11	
M mains input 5 mains on/off 5 maintenance 13 maintenance, operator 13	